


## SURFACE MOUNTING

### ATTENTION!

Accessories not included.

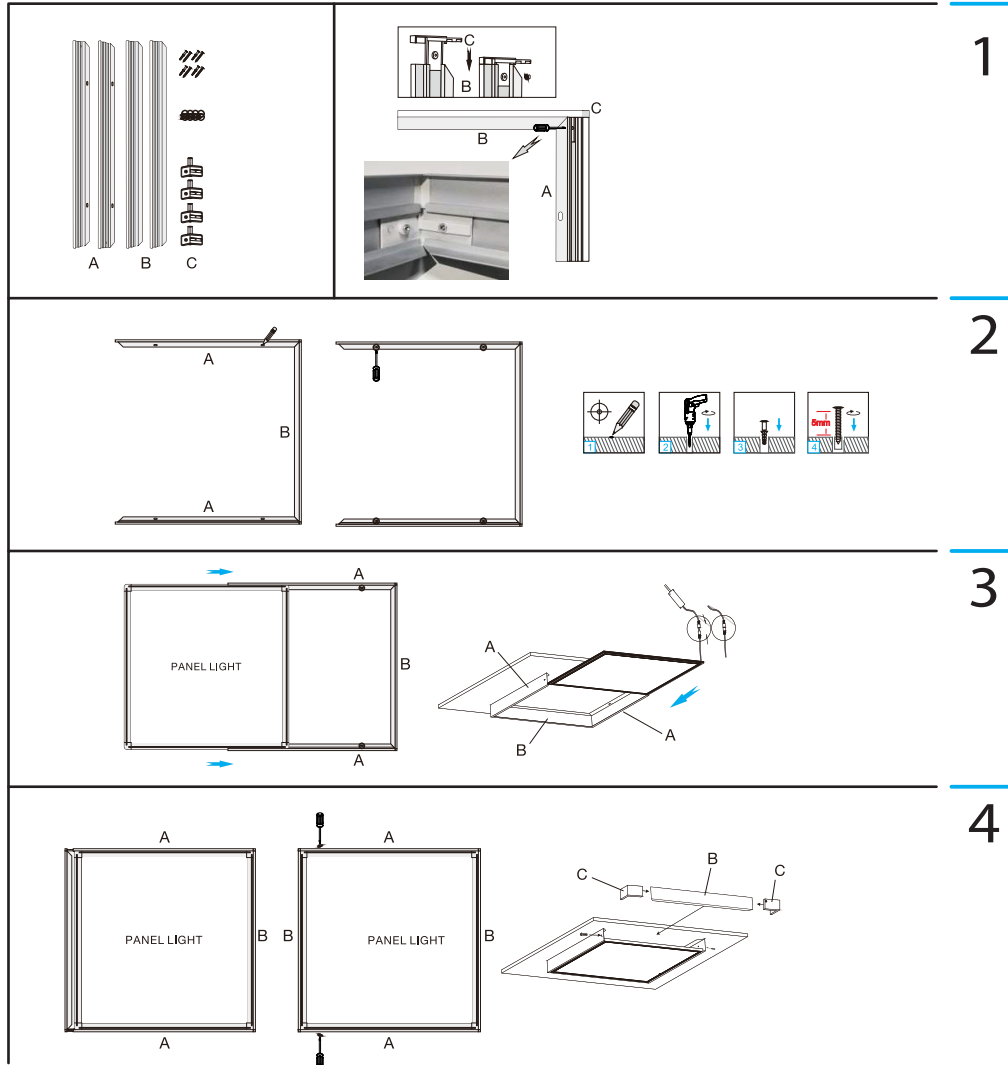


## Instructions GALAXY LED

The installation must be done by a qualified electrician who follows these instructions scrupulously. Only qualified personnel should perform maintenance operations on the product. Ensure the rated voltage of the device is compatible with the power supply voltage. Use a supply cable in conformity with the requirements of the low voltage installations standards.

### I. Specifications 60x60, 120x30 and 60x30 Panels

Power	40W / 20W
Input voltage	220-240 V/AC 50Hz
Lumens	3200 / 1600
IP	IP42
Color temperature	3000K   4000K   6500K
Life span (hrs)	25.000
Switch cycles	20.000

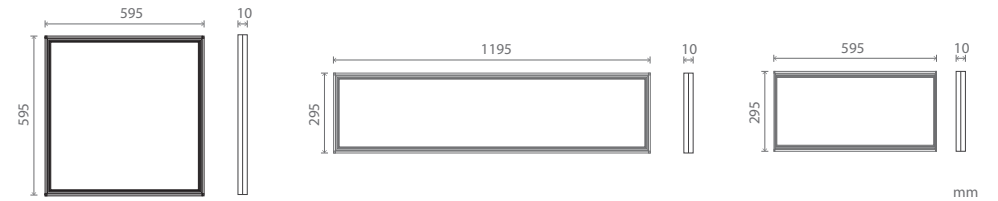

### ATTENTION!


The product should not be altered. Any alteration can make the product hazardous and voids the guarantee. Do not cover it with paper or others flammable materials. Do not wash the lamp or any other type of liquid and/or chemical.

### NO DIMMABLE



This luminaire is provided with no dimmable "driver" and can not be used in installations with dimmers.

- Driver provided with a luminaire
- Suitable for prolonged use.
- No UV or IR

### Symbolism




### RECESSED MOUNTING

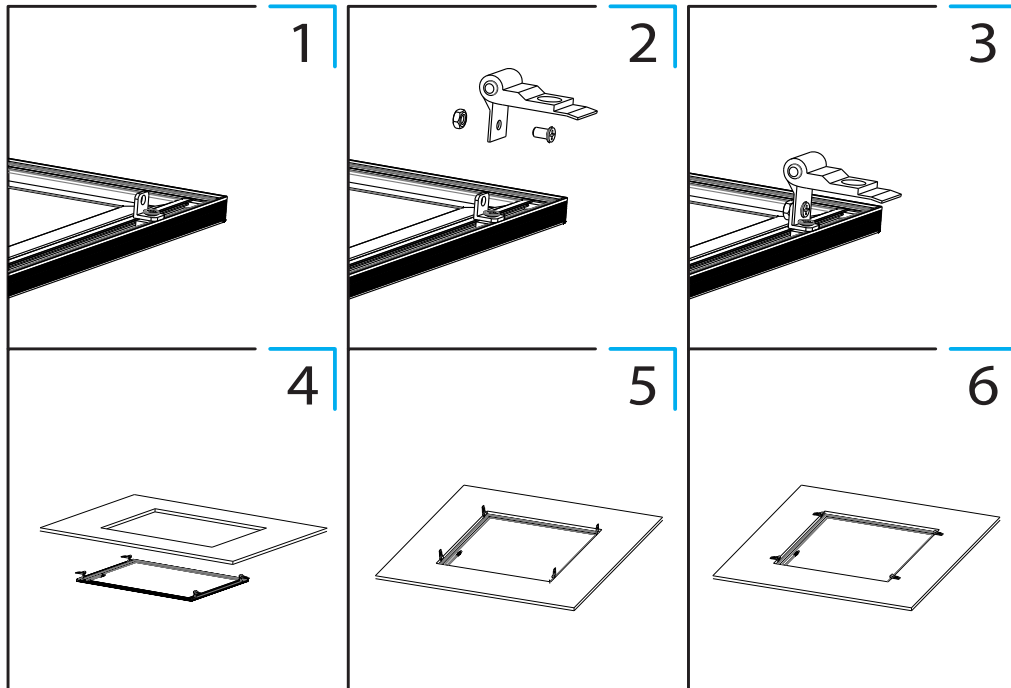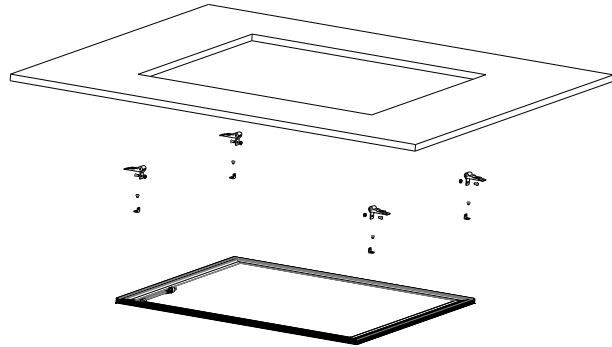

### HANGING MOUNTING

**ATTENTION!**

Accessories not included.

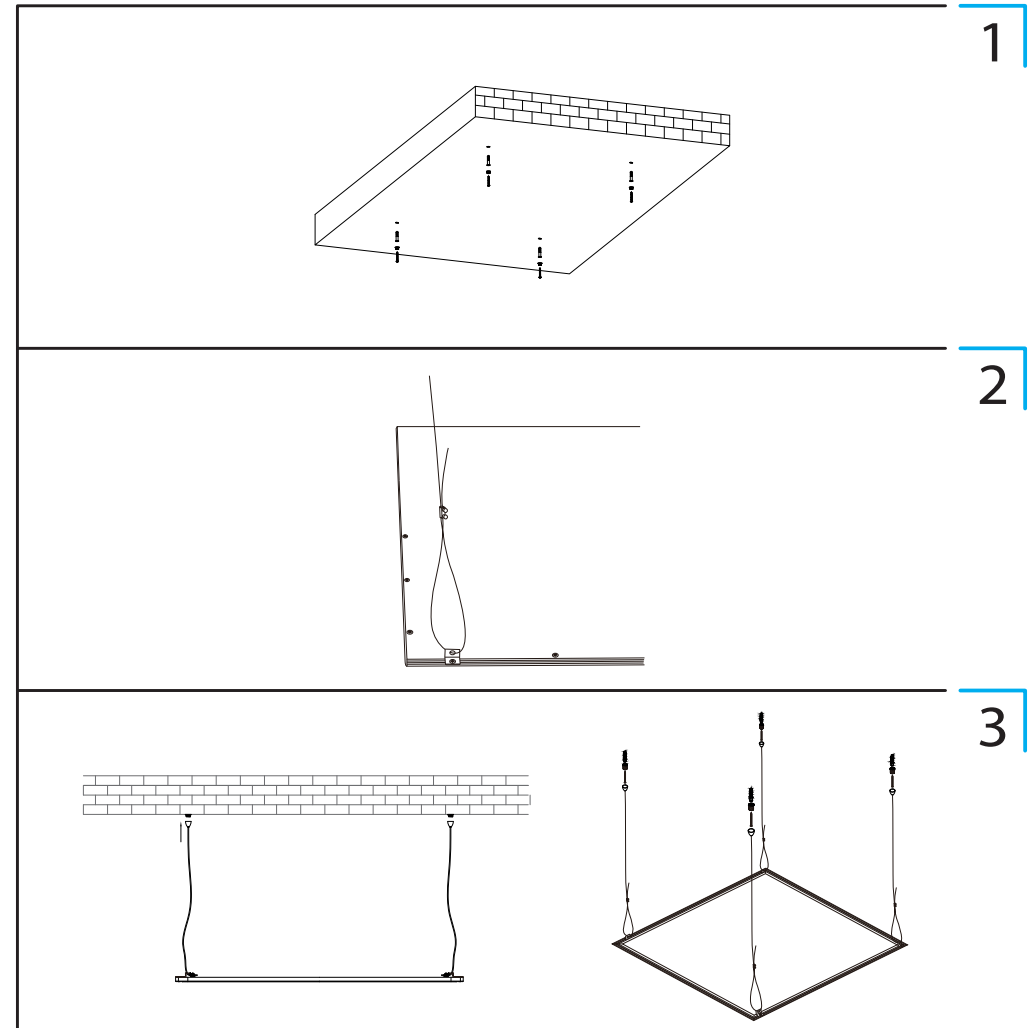

All responsibilities for defects or damages are hereby rejected if caused by: incorrect assembling of the product, incorrect supply, use of lamps not suitable for this product, external agents. BLI/13.1 V1.1 EN



All responsibilities for defects or damages are hereby rejected if caused by: incorrect assembling of the product, incorrect supply, use of lamps not suitable for this product, external agents. BLI/13.1 V1.1 EN